

# Instruction Manual

## Series: TELEP

### Attentions:




Read the instruction carefully before installation, non-observance of this instruction may cause damage to the fixture or hurt to human body. The installation must be carried out by a qualified electrician in accordance with local or national codes. Cut off the power supply before installation and maintenance!

Regularly check the light source, the LED power supply, the cord and other accessories. If any part is damaged, the product should not be used.

Keep this instruction manual handy for future use.

The light source of these products are non-changeable light diodes(LED). Do not disassemble the product, as the light diode can cause damage to the eyes. Use only in indoor, dry location. Clean the product with a dry cloth.

### Dimensions: (mm)

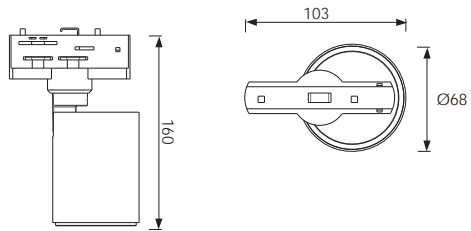

Model	Rated input	Power	Dimming interface	Dimming range	ta
TELEP-R1-220V	220-240VAC	10W	DALI dimmable Screw dimmable	10%-100%	-20...+35 C


### Tools



Electrical Safety Gloves

Clean cloth

screwdriver

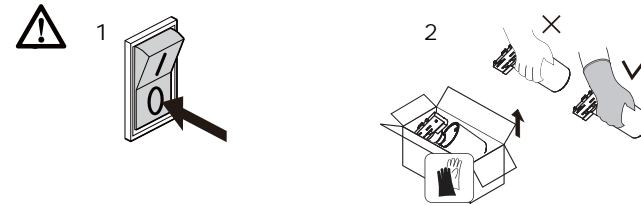

### ❶ Installation(DALI dimmable)

**1**

Track layout should refer to the track installation manual. Turn "L" and "N" knob to perpendicular position to adapter before installing the fixture.

**2**

Insert the track light into the track groove. Keep the rib of the adapter with the same level of track surface.

**3**

Turn "N" knob 90° counterclockwise after inserting the track light.

**4**

"L" knob has three choices to turn according to different circuit.  
 L1: turn the "L" knob 90° counterclockwise.  
 L2: turn the "L" knob 90° clockwise.  
 L3: put down the "L" knob and turn 90° clockwise.

### ❶ Installation(Screw dimmable)

1

Track layout should be refer to the track installation manual.Turn "L" and "N" knob to perpendicular position to adapter before installing the fixture.

2

Insert the track light into the track groove. Keep the rib of the adapter with the same level of track surface.

3

Turn "N" knob 90° counterclockwise after inserting the track light.

4

"L" knob has three choices to turn according to different circuit.

L1: turn the "L" knob 90° counterclockwise.

L2: turn the "L" knob 90° clockwise.

L3: put down the "L" knob and turn 90° clockwise.

5

Turn the screw clockwise to Max.100% brightness. Turn the screw counterclockwise to Min.10% brightness.  
\* Factory setting: brightest level

6

Clean the surface

⚠ Luminaire angle adjustment.

1

350°

2

90°