

## TRACK LIGHTING




### Key Feature

- Outstanding design in black and white finish.
- Anti-glare design, high visual comfort.
- Available in 15 or 25 degree beam angle.
- High flexibility in 350° rotatable and 90° tiltable.
- Efficacy up to 90 lm/W.
- High flexibility in 350° rotatable and 90° tiltable.
- Integrated driver and track adapter.
- Life time: 50,000 hrs (L80, B20, Ta=25°C, 12 hours/Day).

### Key Specification

- Input voltage: 120-240VAC 50/60Hz.
- Power factor: 0.93C.
- Luminaire input power: 20W
- Luminous Flux: 1800 lm@940.
- Luminaire efficacy: 90 lm/W @940.
- Ra (R9) typ.: 93(50)
- Chromaticity tolerance (initial MacAdam): 3 SDCM.
- CCT: 3000K, 4000K
- Beam angle: 15°/25°
- Ta: -20~35°C.
- N.W. : 675 g.
- Housing: Diecasting aluminum spray paint.
- Reflector: Spinning aluminum plated.

## Dimensions: (mm)

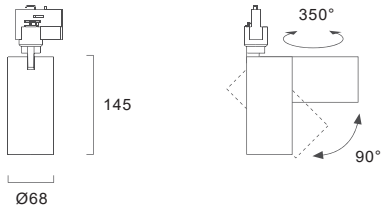

## Specifications

Order no.	Model	Power <sup>[1]</sup> (W)	Ra (R9) <sup>[3]</sup> typ	CCT <sup>[2]</sup> (K)	Beam <sup>[4]</sup> angle	Luminous <sup>[5]</sup> flux(lm)	Luminaire <sup>[6]</sup> efficacy(lm/w)	EEC <sup>[7]</sup>	UGR	QTY/CTN (pcs)	G.W./CTN (kg)	SIZE/CTN (mm)
1032-036510-0130	TELEP2-R1-220V 20 (White)	93(50)	3000	15°	1680	84	A+	<10	8.5	7.9	460x325x195	
1032-036500-0130			4000									1800
1032-036510-0131		93(50)	3000	25°	1630	82	A	<10	8.5	7.9	460x325x195	
1032-036500-0131		93(50)	4000									1740
1032-036510-0132	TELEP2-R1-220V 20 (Black)	93(50)	3000	15°	1680	84	A+	<10	8.5	7.9	460x325x195	
1032-036500-0132			93(50)									4000
1032-036510-0133		93(50)	3000	25°	1630	82	A	<10	8.5	7.9	460x325x195	
1032-036500-0133		93(50)	4000									1740

[1]: Measurement precision for input voltage/current /power +/- 10%, W = kWh/1000h.

[2]: Comply with ANSI C78.377

[3]: Minimum Ra(TYP.) is rated value - 2.


[4]: Beam angle ≤20°, measurement precision +/- 20%; beam angle >20°, measurement precision +/- 15 %.

[5]: Minimum Luminous flux is 90% of rated value.

[6]: Minimum Luminaire efficacy is 90% of rated value.


[7]: Energy efficiency class.

## Photometrics(reference)

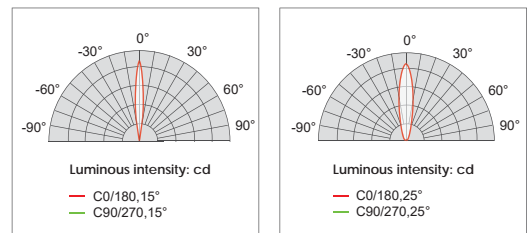

**Color Bin Definition**


Chromaticity tolerance (initial MacAdam): 3 SDCM (3000K,4000K)  
 Color coordinates (CIEx, CIEy): 3000K(0.4339,0.4033),4000K(0.3818,0.3797)  
 Measurement precision for x ,y +/- 0.005

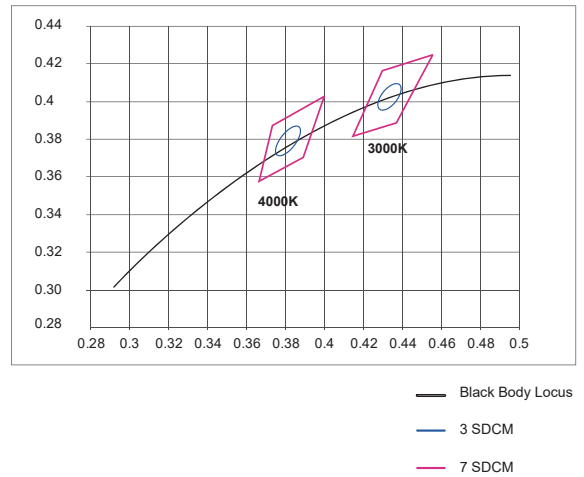

**Standards**

EN60598-1, EN 60598-2-1, EN62471, EN61547,EN55015,  
 EN61000-3-2, EN61000-3-3,  
 GB7000.1, GB7000.201

**Energy label**

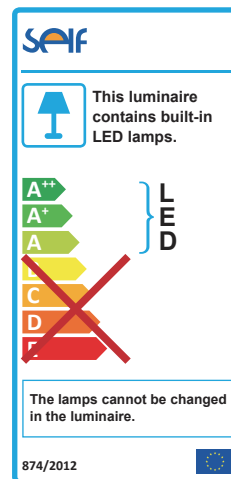

**Sales & Technical Support**

**SELF Electronics Germany GmbH**  
 August-Horch-Str. 7,51149 Cologne  
 Phone: +492203-18501-0  
 Fax: 492203-18501-199  
 E-mail: saleseu@self-electronics.com

**SELF Electronics Co.,Ltd.(Headquarters)**  
 Add: No. 1345 JuXian Road,Ningbo Hi Tech Park, Ningbo,China 315103  
 Phone: +86-574-2880-5765, +86-574-2880-5658 (for English assistance)  
 +86-574-2880-5678 (for Chinese assistance)  
 Fax: +86-574-28805656  
 E-mail: sales@self-electronics.com  
 http://www.self-electronics.com

**SELF Electronics USA Corporation**  
 3264 Saturn Ct, Peachtree Corners, GA 30092  
 Phone: +1-770-248-9023  
 Fax: +1-770-248-9028  
 E-mail: salesus@self-electronics.com

\* Due to continuous improvements and innovations,specifications may change without notice.