

# TRACK SINGLE2 SERIES

## TRACK LIGHTING




### Key Feature

- Stylish appearance in black and white finish
- High quality light output,Ra (R9) typ.: 93(50)
- Available in 15 or 25 or 45 degree beam angle.
- High flexibility in 350° rotatable and 90° tiltable.
- Integrated driver and track adapter
- Lifetime: 50,000hrs (L80, B20, Ta=25 C, 12hours/Day).

### Key Specification

- Input voltage: 220-240VAC 50/60Hz.
- Power factor: 0.925C.
- Luminaire input power: 28W
- Luminous Flux: 2730lm@940.
- Luminaire efficacy: 98lm/W @940.
- Ra (R9) typ.: 93(50)
- Chromaticity tolerance (initial MacAdam): 3 SDCM.
- CCT: 2700K, 3000K, 4000K, meat.
- Beam angle: 15°/25°/45°
- Ta: -20~35°C.
- N.W. : 350 g.
- Housing: Diecasting aluminum spray paint.
- Reflector: Spinning aluminum plated.

**Dimensions: (mm)**

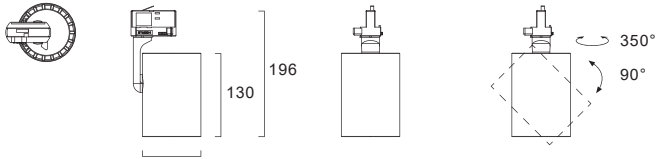

**Specifications**

Order no.	Model	Power <sup>[1]</sup> (W)	Ra (R9) <sup>[3]</sup> typ	CCT <sup>[2]</sup> (K)	Beam <sup>[4]</sup> angle	Luminous <sup>[5]</sup> flux(lm)	Luminaire <sup>[6]</sup> efficacy(lm/w)	UGR	QTY/CTN (pcs)	G.W./CTN (kg)	SIZE/CTN (mm)
-			93(50)	2700		2240	80				
1032-050110-0130			93(50)	3000		2350	84				
1032-050100-0130			93(50)	4000	15°	2530	90	< 19	6	6.5	445x435x155
1032-097920-0130			-	meat		1420	51				
-			93(50)	2700		2352	84				
1032-050110-0131	TRACK SINGLE2 MO-R1-220V-R 28		93(50)	3000		2470	88				
1032-050100-0131	(White)		93(50)	4000	25°	2660	95	< 19	6	6.5	445x435x155
1032-050120-0132			-	meat		1490	53				
-			93(50)	2700		2408	86				
1032-050110-0132			93(50)	3000		2540	91				
1032-050100-0132			93(50)	4000	45°	2730	98	< 20	6	6.5	445x435x155
1032-050120-0133			-	meat		1530	55				
-			93(50)	2700		2240	80				
1032-050110-0133			93(50)	3000		2350	84				
1032-050100-0133			93(50)	4000	15°	2530	90	< 19	6	6.5	445x435x155
1032-097920-0131			-	meat		1420	51				
-			93(50)	2700		2352	84				
1032-050110-0134	TRACK SINGLE2 MO-R1-220V-R 28		93(50)	3000		2470	88				
1032-050100-0134	(Black)		93(50)	4000	25°	2660	95	< 19	6	6.5	445x435x155
1032-097920-0132			-	meat		1490	53				
-			93(50)	2700		2408	86				
1032-050110-0135			93(50)	3000		2540	91				
1032-050100-0135			93(50)	4000	45°	2730	98	< 20	6	6.5	445x435x155
1032-097920-0133			-	meat		1530	55				

[1]: Measurement precision for input voltage/current /power +/- 10%, W = kWh/1000h.

[2]: Comply with ANSI C78.377

[3]: Minimum Ra(TYP.) is rated value - 2.


[4]: Beam angle ≤20°, measurement precision +/- 20%; beam angle >20°, measurement precision +/- 15%.

[5]: Minimum Luminous flux is 90% of rated value.

[6]: Minimum Luminaire efficacy is 90% of rated value.

[7]: Energy efficiency class, as determined in accordance with Commission Delegated Regulation (EU) 2019/2015.

Photometrics(reference)

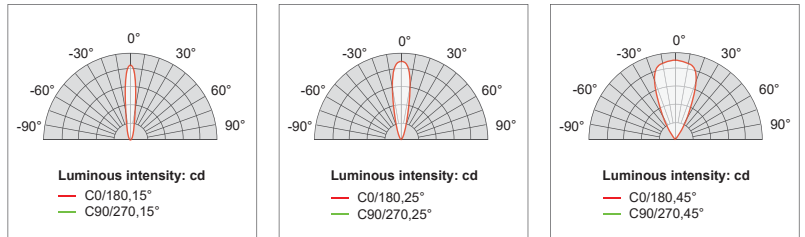

Standards

- EN60598-1
- EN 60598-2-1
- EN62471
- EN61547
- EN55015
- EN61000-3-2
- EN61000-3-3

Sales & Technical Support

**SELF Electronics Germany GmbH**  
August-Horch-Str. 7,51149 Cologne  
Phone: +492203-18501-0  
Fax: 492203-18501-199  
E-mail: saleseu@self-electronics.com

**SELF Electronics Co.,Ltd.(Headquarters)**  
Add: No. 1345 JuXian Road,Ningbo Hi Tech Park, Ningbo,China 315103  
Phone: +86-574-2880-5765, +86-574-2880-5658 (for English assistance)  
+86-574-2880-5678 (for Chinese assistance)  
Fax: +86-574-28805656  
E-mail: sales@self-electronics.com  
<http://www.self-electronics.com>

**SELF Electronics USA Corporation**  
3264 Saturn Ct, Peachtree Corners, GA 30092  
Phone: +1-770-248-9023  
Fax: +1-770-248-9028  
E-mail: salesus@self-electronics.com

\* Due to continuous improvements and innovations,specifications may change without notice.