

# TRACK SINGLE2-L SERIES

## TRACK LIGHTING




### Key Feature

- Anti-glare design with darklight technology, Shielding angle: 35°
- Stylish appearance in black and white finish
- High quality light output, Ra (R9) typ.: 93(50)
- Available in 25, 45 or 60 degree beam angle.
- High flexibility in 350° rotatable and 90° tiltable.
- Integrated driver and track adapter
- Lifetime: 50,000hrs (L80, B20, Ta=25 C , 12hours/Day).

### Key Specification

- Input voltage: 220-240VAC 50/60Hz.
- Power factor: 0.95
- Luminaire input power: 20/28W
- Luminous Flux: 2770/3700lm@940.
- Luminaire efficacy: 138/132lm/W @940.
- Ra (R9) typ.: 93(50)
- Chromaticity tolerance (initial MacAdam): 3 SDCM.
- CCT: 2700K,3000K,4000K
- Beam angle: 25°/45°/60°
- Ta: -20~35°C.
- N.W. : 350 g.
- Housing: Die-cast aluminium powder-coated
- Optical lens: Plastic injection.
- Optical reflector: Aluminum spinning vacuum plated.

**Dimensions: (mm)**

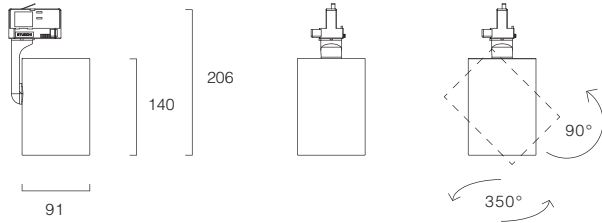

**Specifications**

Order no.	Model	Power <sup>[1]</sup> (W)	Ra (R9) <sup>[3]</sup> typ	CCT <sup>[2]</sup> (K)	Beam angle	Luminous <sup>[5]</sup> flux(lm)	Luminaire <sup>[6]</sup> efficacy(lm/w)	UGR	QTY/CTN (pcs)	G.W./CTN (kg)	SIZE/CTN (mm)
-			93(50)	2700		2620	131				
1032-098010-0130			93(50)	3000	25°	2680	134	<18	12	10	585x235x255
1032-098000-0130			93(50)	4000		2740	137				
-			93(50)	2700		2680	134				
1032-098010-0131	TRACK SINGLE2 LO-R1-220V-L	20	93(50)	3000	45°	2740	137	<18	12	10	585x235x255
1032-098000-0131	(White)		93(50)	4000		2770	138				
-			93(50)	2700		2620	131				
1032-098010-0132			93(50)	3000	60°	2680	134	<18	12	10	585x235x255
1032-098000-0132			93(50)	4000		2740	137				
-			93(50)	2700		2620	131				
1032-098010-0133			93(50)	3000	25°	2680	134	<18	12	10	585x235x255
1032-098000-0133			93(50)	4000		2740	137				
-			93(50)	2700		2680	134				
1032-098010-0134	TRACK SINGLE2 LO-R1-220V-L	20	93(50)	3000	45°	2740	137	<18	12	10	585x235x255
1032-098000-0134	(Black)		93(50)	4000		2770	138				
-			93(50)	2700		2620	131				
1032-098010-0135			93(50)	3000	60°	2680	134	<18	12	10	585x235x255
1032-098000-0135			93(50)	4000		2740	137				

## Specifications

Order no.	Model	Power <sup>[1]</sup> (W)	Ra (R9) <sup>[3]</sup> typ	CCT <sup>[2]</sup> (K)	Beam <sup>[4]</sup> angle	Luminous <sup>[5]</sup> flux(lm)	Luminaire <sup>[6]</sup> efficacy(lm/w)	UGR	QTY/CTN (pcs)	G.W./CTN (kg)	SIZE/CTN (mm)
-			93(50)	2700		3500	125				
1032-098210-0130			93(50)	3000	25°	3580	128	<18	12	10	585x235x255
1032-098200-0130			93(50)	4000		3660	131				
-			93(50)	2700		3580	128				
1032-098210-0131	TRACK SINGLE2 MO-R1-220V-L (White)	28	93(50)	3000	45°	3660	131	<18	12	10	585x235x255
1032-098200-0131			93(50)	4000		3700	132				
-			93(50)	2700		3500	125				
1032-098210-0132			93(50)	3000	60°	3580	128	<18	12	10	585x235x255
1032-098200-0132			93(50)	4000		3660	131				
-			93(50)	2700		3500	125				
1032-098210-0133			93(50)	3000	25°	3580	128	<18	12	10	585x235x255
1032-098200-0133			93(50)	4000		3660	131				
-			93(50)	2700		3580	128				
1032-098210-0134	TRACK SINGLE2 MO-R1-220V-DL (Black)	28	93(50)	3000	45°	3660	131	<18	12	10	585x235x255
1032-098200-0134			93(50)	4000		3700	132				
-			93(50)	2700		3500	125				
1032-098210-0135			93(50)	3000	60°	3580	128	<18	12	10	585x235x255
1032-098200-0135			93(50)	4000		3660	131				

[1]: Measurement precision for input voltage/current /power +/- 10%, W = kWh/1000h.

[2]: Comply with ANSI C78.377

[3]: Minimum Ra(TYP.) is rated value - 2.


[4]: Beam angle ≤20°, measurement precision +/- 20%; beam angle >20°, measurement precision +/- 15 %.

[5]: Minimum Luminous flux is 90% of rated value.

[6]: Minimum Luminaire efficacy is 90% of rated value.

[7]: Energy efficiency class, as determined in accordance with Commission Delegated Regulation (EU) 2019/2015.

## Photometrics(reference)

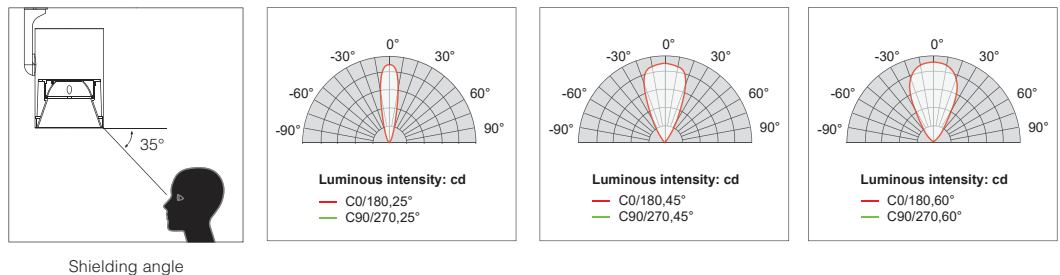

## Standards

---

EN60598-1  
EN 60598-2-1  
EN62471  
EN61547  
EN55015  
EN61000-3-2  
EN61000-3-3

## Sales & Technical Support

---

**SELF Electronics Germany GmbH**  
August-Horch-Str. 7, 51149 Cologne  
Phone: +492203-18501-0  
Fax: 492203-18501-199  
E-mail: [saleseu@self-electronics.com](mailto:saleseu@self-electronics.com)

**SELF Electronics Co.,Ltd.(Headquarters)**  
Add: No. 1345 JuXian Road,Ningbo Hi Tech Park, Ningbo,China 315103  
Phone: +86-574-2880-5765, +86-574-2880-5658 (for English assistance)  
+86-574-2880-5678 (for Chinese assistance)  
Fax: +86-574-28805656  
E-mail: [sales@self-electronics.com](mailto:sales@self-electronics.com)  
<http://www.self-electronics.com>

**SELF Electronics USA Corporation**  
3264 Saturn Ct, Peachtree Corners, GA 30092  
Phone: +1-770-248-9023  
Fax: +1-770-248-9028  
E-mail: [salesus@self-electronics.com](mailto:salesus@self-electronics.com)

---

\* Due to continuous improvements and innovations, specifications may change without notice.