




- Housing: Die-cast aluminium powder-coated.
- Optical reflector: Aluminum spinning vacuum plated.
- LED parts: COB LED, non-replaceable.
- Chromaticity tolerance (initial MacAdam): 3 SDCM.
- Input: DC36V, Max. 750mA.
- Ta: -20~35°C.
- Lifetime: 50,000 hrs (L80, B20, Ta = 25°C, 12 hrs/day).
- Degree of protection: IP20.
- DALI and NON-DALI both available.
- Impact resistance: IK02.



Dimensions: (mm)

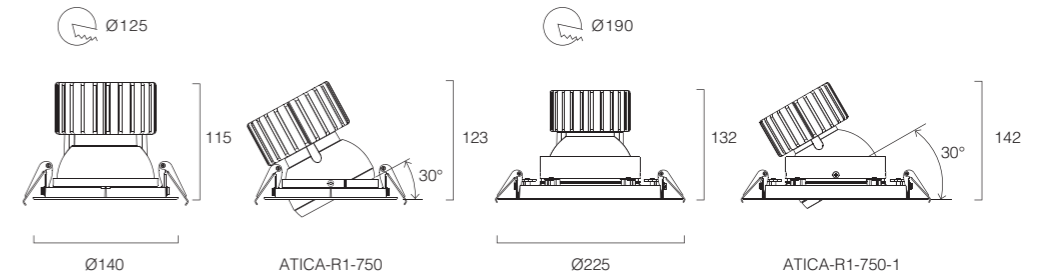


Specifications

Order no.	Model	Power (W)	Ra(R9) typ	CCT (K)	Beam angle	*Luminous flux(lm)	*Luminaire efficacy(lm/w)	UGR	QTY/CTN (pcs)	G.W./CTN (kg)	SIZE/CTN (mm)
1032-097810-0130	ATICA-R1-750	Max.28	93(50)	3000	25°	3948	141	20	-	-	-
1032-097810-0131			93(50)	4000	45°	3948	141	20	-	-	-
1032-088210-0131	ATICA-R1-750-1	Max.28	93(50)	3000	25°	3948	141	20	-	-	-
1032-088210-0132			93(50)	4000	45°	3948	141	20	-	-	-

* The luminous flux and the efficacy is tested under CCT 4000K

Photometrics

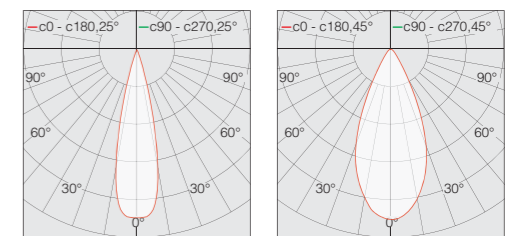

Accessories (optional)

Order No.	Photo	Description	QTY/CTN (pcs)	G.W./CTN (kg)	SIZE/CTN (mm)
-		Model: SLT35-1000IL-UN Matching driver, max. 35W. Input: 110-277VAC Output: 750mA 200mm cable +plug. (Included)	-	-	-