

NAKA MUTA2 RECESSED LIGHTING




NAKA MUTA2 RECESSED LIGHTING



- Housing: Die-cast aluminium powder-coated.
- Optical reflector: Aluminum spinning vacuum plated.
- LED parts: COB LED, non-replaceable.
- Chromaticity tolerance (initial MacAdam): 3 SDCM.
- Input: DC36V, Max. 750mA.
- Ta: -20~35°C.
- Lifetime: 50,000 hrs (L80, B20, Ta = 25°C, 12 hrs/day).
- Degree of protection: IP20.
- DALI and NON-DALI driver both available.
- Impact resistance: IK02.




Dimensions: (mm)

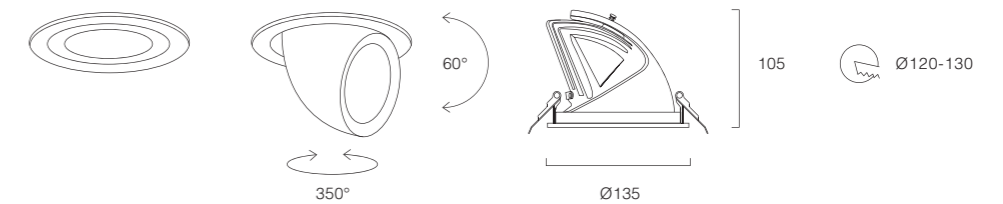

Specifications

Order no.	Model	Power (W)	Ra (R9) typ	CCT (K)	Beam angle	Luminous flux(lm)	Luminaire efficacy(lm/w)	UGR	QTY/CTN (pcs)	G.W./CTN (kg)	SIZE/CTN (mm)
1032-088110-0130	NAKA MUTA2-R1-750	Max.28	93(50)	3000	35°	3450	136	20	12	7.6	525x350x265
1082-065400-0132	(White)		93(50)	4000		3520	139				

Photometrics



Accessories (optional)

Order No.	Photo	Description	QTY/CTN (pcs)	G.W./CTN (kg)	SIZE/CTN (mm)
-		Model: SLT35-1000IL-UN Matching driver, max. 35W. Input: 110-277VAC Output: 750mA 200mm cable +plug. (Included)	-	-	-

